

# Situo® 1 and 4 Zigbee Pure

Situo 1 Zigbee: 1800194

Situo 4 Zigbee: 1800195



## OVERVIEW:

Situo® Zigbee offers simple, convenient control for motorized window coverings and exterior screens. Available in a clean white (Pure) finish sporting a sleek, modern look, it adds a touch of elegance to every décor. Available in 1 & 4 channel options, Situo Zigbee transmitters must be used with the TaHoma® RTS/Zigbee Smartphone & Tablet Interface.



## TECHNICAL SPECIFICATIONS:

- Power: 3V, CR2430 Lithium battery
- Material: ABS
- Dimensions: 5.35" L x 1.66" W x .67" H
- Operating Temperature Range: 32° F (0° C) / 140° F (60° C)
- Frequency: 433.42 MHz +/- 100KHz
- Degree of Protection: IP30
- Shipping Weight: 1 lb

## FEATURES SUMMARY:

- 4 channels of control.
- Control one motorized product, or one group of motorized Zigbee products per channel.
- Control for the Zigbee Smart Plug (1800127)
- Control for the TaHoma® to Digital Motor Interface (DMI) (1870743)
- Rubberized for maximum grip.

## WHAT'S IN THE BOX:


- Remote, including battery
- Optional wall mounting clip
- Instructions
- Wall mount
- Screw set

## CONNECTIONS AND INDICATORS:



ELEMENT	FUNCTION
1 <b>UP Button</b>	Up directional button
2 <b>"MY" Button</b>	"MY" favorite position or STOP button
3 <b>DOWN Button</b>	Down directional button
4 <b>LED Indicators</b>	Illuminates to confirm Zigbee signal transmission
5 <b>Channel Selector Button</b>	Select channel to operate
6 <b>QR Code (on back)</b>	To pair transmitter with the Zigbee network

## DIMENSIONS:

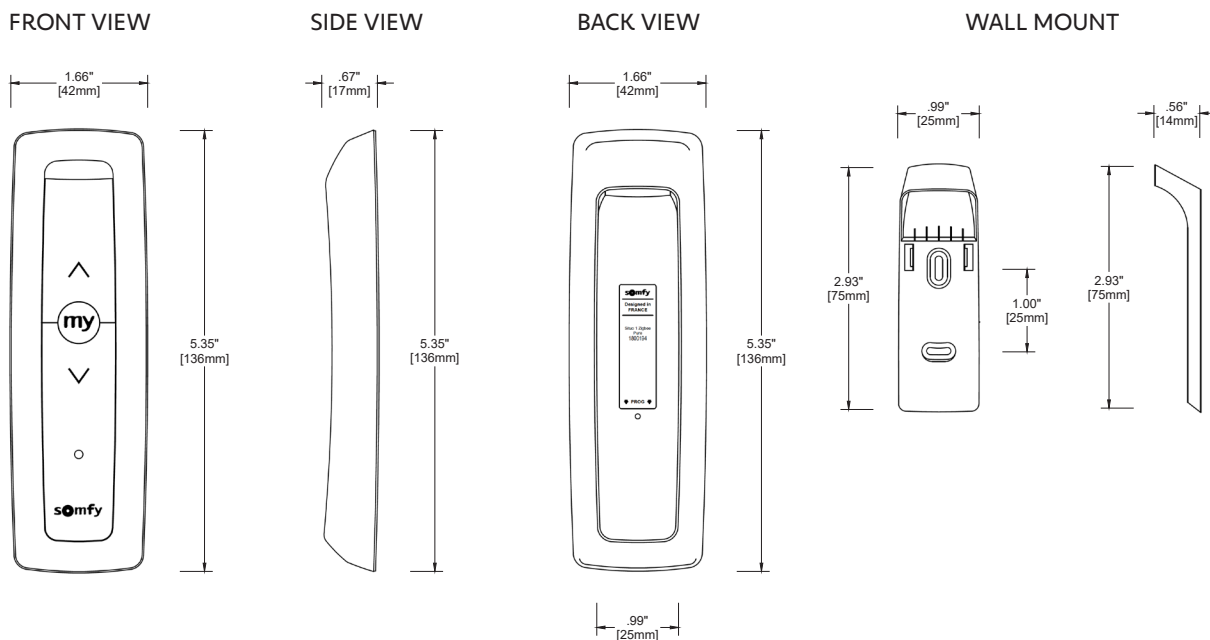

## BEST WIRING PRACTICES:

The diagram shown below is meant for illustrative purposes to show the connections from product to product. This device could be used in other configurations than shown below. For specification information on individual products, see related product information.

